ASPÖCK TPMS

REIFENDRUCK-KONTROLLSYSTEM
gemäß Regelung ECE 141

TYRE PRESSURE MONITORING
SYSTEM, according to ECE R141

aspoeck.com

A.PiERiNGER GmbH
www.ap.works
2141 Ameis, Obere Hauptstraße 68
Telefon: +43 / 2425 / 278 00
E-Mail: vk@ap.co.at

PRODUCT INFO

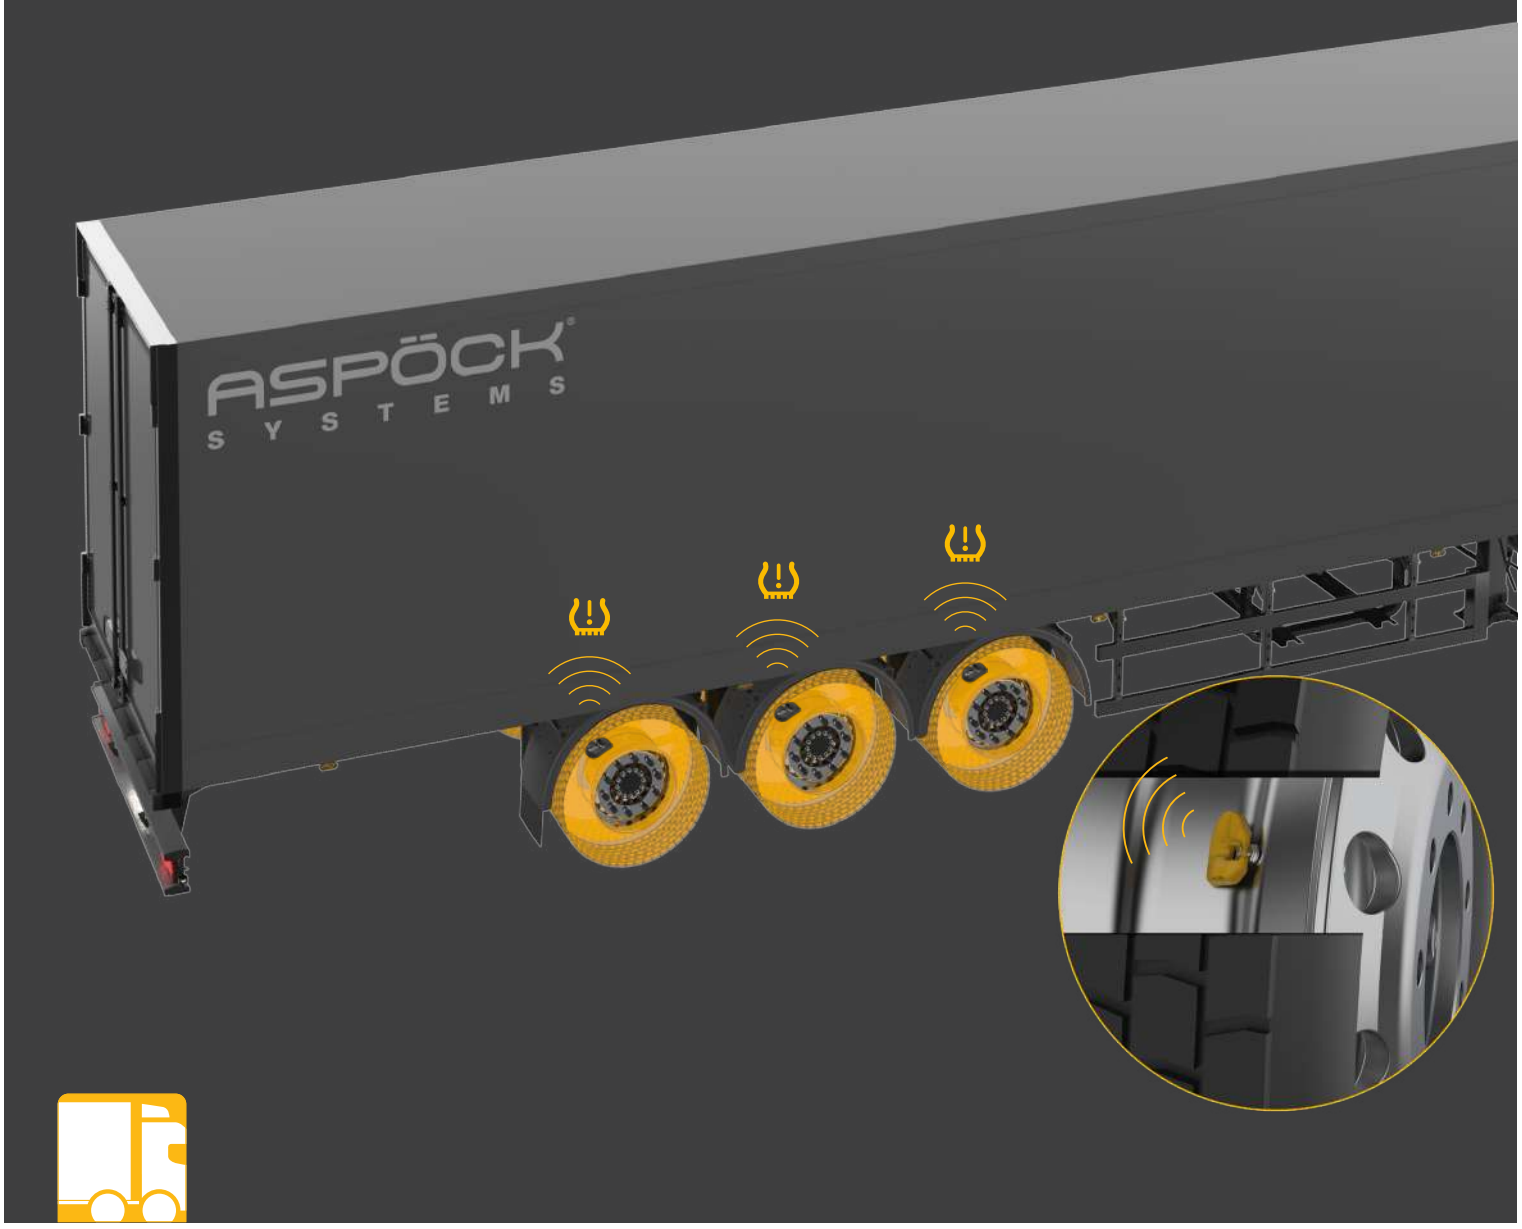

ASPÖCK TPMS

REIFENDRUCK-KONTROLLSYSTEM GEMÄSS NEUER ECE 141 REGELUNG
TYRE PRESSURE MONITORING SYSTEM ACC. TO THE NEW ECE 141 REGULATION

TPMS Receiver RX18

TPMS Sub-Receiver eRX

TPMS Sensor

FEATURES

KOMPATIBEL MIT DEN GÄNGIGSTEN EBS-MARKEN (WABCO/ZF, KNORR-BREMSE, HALDEX)
COMPATIBLE WITH ALL COMMON EBS BRANDS (WABCO/ZF, KNORR-BREMSE, HALDEX)

AUTOMATISCHE SENSORERKENNUNG „AUTO LOCATE“
AUTOMATIC SENSOR DETECTION “AUTO-LOCATE”

KABELSYSTEM ANPASSBAR AN KUNDENSPEZIFISCHE ANFORDERUNGEN
CABLE SYSTEM ADAPTABLE ON CUSTOMER SPECIFIC DEMANDS

STAY TUNED



ASPÖCK TPMS RECEIVER MAXRX18

TECHNISCHE DATEN TPMS Receiver Rx18 TECHNICAL FACTS TPMS Receiver Rx18	
SPANNUNGSBEREICH/LEISTUNGSAUFNAHME: VOLTAGE RANGE/ POWER CONSUMPTION:	8 - 32 V
NENNSPANNUNG: NOMINAL VOLTAGE:	12V / 24V
GEHÄUSEMATERIAL: HOUSING MATERIAL:	Nylon, Messing Nylon, brass
TEMPERATURBEREICH: TEMPERATURE RANGE:	-40°C - +85°C
GEWICHT: WEIGHT:	120 g
SCHUTZART: PROTECTION:	IP 6K9K I ADR
EMV-ZULASSUNG: EMC APPROVAL:	E24 10R-06 3521



ASPÖCK TPMS SUB - RECEIVER ERX

TECHNISCHE DATEN TPMS Sub - Receiver eRX TECHNICAL FACTS TPMS Sub - Receiver eRX	
GEHÄUSEMATERIAL: HOUSING MATERIAL:	Nylon, Messing Nylon, brass
TEMPERATURBEREICH: TEMPERATURE RANGE:	-40°C - +85°C
GEWICHT: WEIGHT:	48 g
SCHUTZART: PROTECTION CLASSIFICATION:	IP 6K9K I ADR
EMV-ZULASSUNG: EMC APPROVAL:	E24 10R-06 3125



ASPÖCK TPMS SENSOR



ASPÖCK TPMS SENSOR SCREW M6

TECHNISCHE DATEN TPMS Sensor TECHNICAL FACTS TPMS Sensor		
GEHÄUSEMATERIAL: HOUSING MATERIAL:		Glasverstärktes Nylon und Edelstahl Glass-reinforced nylon and stainless steel
BATTERIE BATTERY	TYP: TYPE:	Lithium-Knopfzelle (nicht austauschbar) Lithium coin cell (non-replaceable)
	LEBENSDAUER: LIFE:	5 - 7 Jahre 5 - 7 years
GEWICHT: WEIGHT:		25,1 g
DRUCKMESSBEREICH: PRESSURE SENSING RANGE:		0 to 13.915 Bar
PRESSURE SENSING ACCURACY: GENAUIGKEIT DES DRUCKSENSORS:		+/- 220 mBar
TEMPERATURBEREICH: TEMPERATURE RANGE:		-40°C - +120°C
TEMPERATURERFASSUNGSBEREICH: TEMPERATURE SENSING RANGE:		-40°C - +120°C
GENAUIGKEIT DER TEMPERATURERFASSUNG: TEMPERATURE SENSING ACCURACY:		+/- 3°C
SCHUTZART: PROTECTION CLASSIFICATION:		IPX6K
EMV-ZULASSUNG: EMC APPROVAL:		E24 10R-06 3558

	BEST. NR OEM PART NO OEM	BEST. NR AM PART NO AM	VERSION	ZUSATZ ADD ON
SYSTEM KOMPONENTEN SYSTEM PARTS	75-0210-007	75-0210-001	[A]	TPMS Receiver Rx18
	75-0210-107	75-0210-101	[B]	TPMS Sub Receiver eRx
	75-0210-207		[C]	TPMS Valve-Sensor
		75-0210-204		TPMS Valve-Sensor + Schraube M6 + Sticker Felge + Montageanleitung TPMS Valve-Sensor + screw M6 + sticker rim + mounting instruction
	14-1620-057			TPMS Valve-Sensor Schraube M6 TPMS Valve-Sensor screw M6
	14-4314-007			TPMS cradle for sensor mounting
	14-4315-007			TPMS strap for sensor strap mounting
		14-4315-014		TPMS strap + cradle kit without sensor
	10-0211-327			Sticker Anhänger: 140 x 50 mm Sticker trailer: 140 x 50 mm
	10-0211-337			Sticker Felge: 60 x 20 mm Sticker rim: 60 x 20 mm

Sticker Anhänger: 140 x 50 mm
Sticker trailer: 140 x 50 mm

Sticker Felge: 60 x 20 mm
Sticker rim: 60 x 20 mm

	BEST. NR OEM PART NO OEM	BEST. NR AM PART NO AM	VERSION	ZUSATZ ADD ON	
KABEL CABLES	78-7022-007	78-7022-004	[D]	TPMS Knorr EBS3-Rx18	1 m
	78-7022-017	78-7022-014	[D]	TPMS Knorr EBS3-Rx18	6 m
	78-7022-057	78-7022-054	[E]	TPMS Knorr EBS3-K1.2	1 m
	78-7022-307	78-7022-304	[D]	TPMS Wabco EBS3 - Rx18	2 m
	78-7022-317	78-7022-314	[D]	TPMS Wabco EBS3 - Rx18	6 m
	78-7022-357	78-7022-354	[E]	TPMS Wabco EBS3 - K1.2	2 m
	78-7022-707	78-7022-704	[D]	TPMS Haldex EBS4 - Rx18	1 m
	78-7022-717	78-7022-714	[D]	TPMS Haldex EBS4 - Rx18	6 m
	78-7022-757	78-7022-754	[E]	TPMS Haldex EBS4 - K1.2	1 m
	78-7021-607	78-7021-604	[F]	TPMS K1.2 - Rx18 + K1.2	1 m
	78-7021-407	78-7021-404	[G]	TPMS K1.2 - eRx	1 m

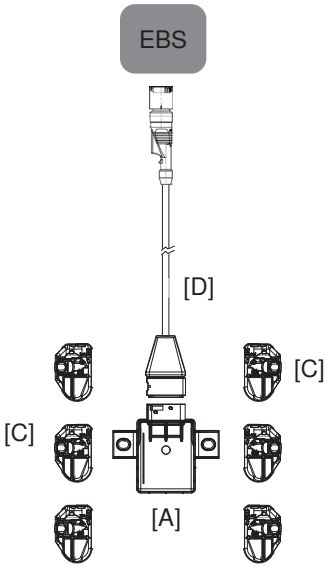

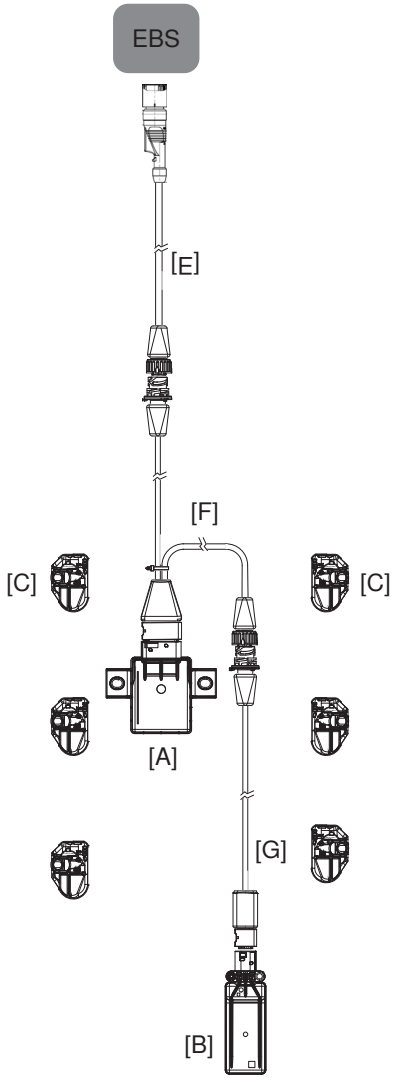

	BEST. NR OEM PART NO OEM	BEST. NR AM PART NO AM	VERSION	ZUSATZ ADD ON
TPMS PROGRAMMING ACCESSORIES	75-9012-007	75-9012-001	[1]	BARTEC Tech350 – TPMS – Handgerät BARTEC Tech350 - TPMS - Handheld device
	69-0447-007	69-0447-004		TPMS-Programmierkabel TPMS - programming cable
	69-0447-017	69-0447-004		TPMS - Programmierkabel 3/4 eRx TPMS - programming cable 3/4 eRx
		75-9012-101		BARTEC Tech 350 - TPMS - Diagnose-KIT BARTEC Tech 350 - TPMS - Diagnostic KIT

	BEST. NR OEM PART NO OEM	BEST. NR AM PART NO AM	VERSION	ZUSATZ ADD ON
TPMS EOL-TEST EQUIPMENT	75-9012-207	75-9012-201		Aspöck - Gateway Iso 11992 - 24V
	69-0447-107	69-0447-104		TPMS - EOL Test Adapter
	69-0354-007	69-0354-004		PCAN - USB Adapter
		75-9012-111		Aspöck - EOLT KIT

[1]

A.PiERiNGER GmbH
www.ap.works
2141 Ameis, Obere Hauptstraße 68
Telefon: +43 / 2425 / 278 00
E-Mail: vk@ap.co.at

product information_TPMS_V7 | 2025-01
Misprints, technical changes and illustrations are subject to change.
© Aspöck Systems GmbH
Non-compliance with the information given (e.g. temperature) results in the exclusion of warranty/liability. For details, see the mounting instructions/TSD *www.aspoeck.com.*